



U.S. DEPT. OF COMMERCE
PATENT & TRADEMARK OFFICE

FIG.2

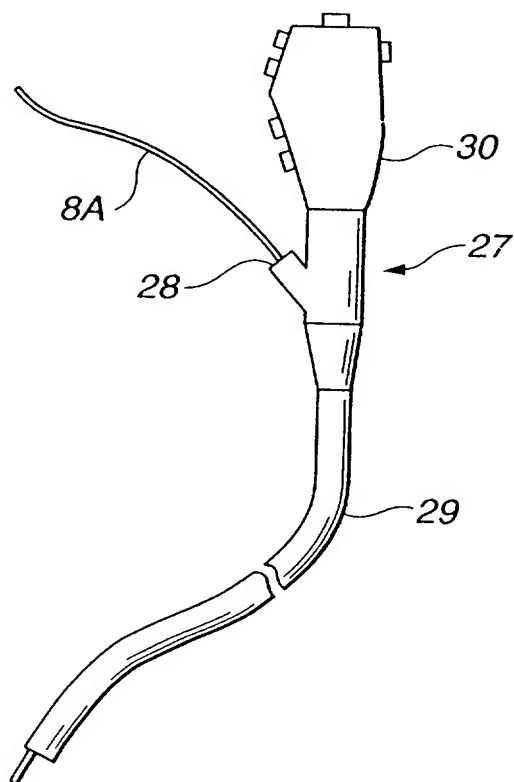


FIG.3

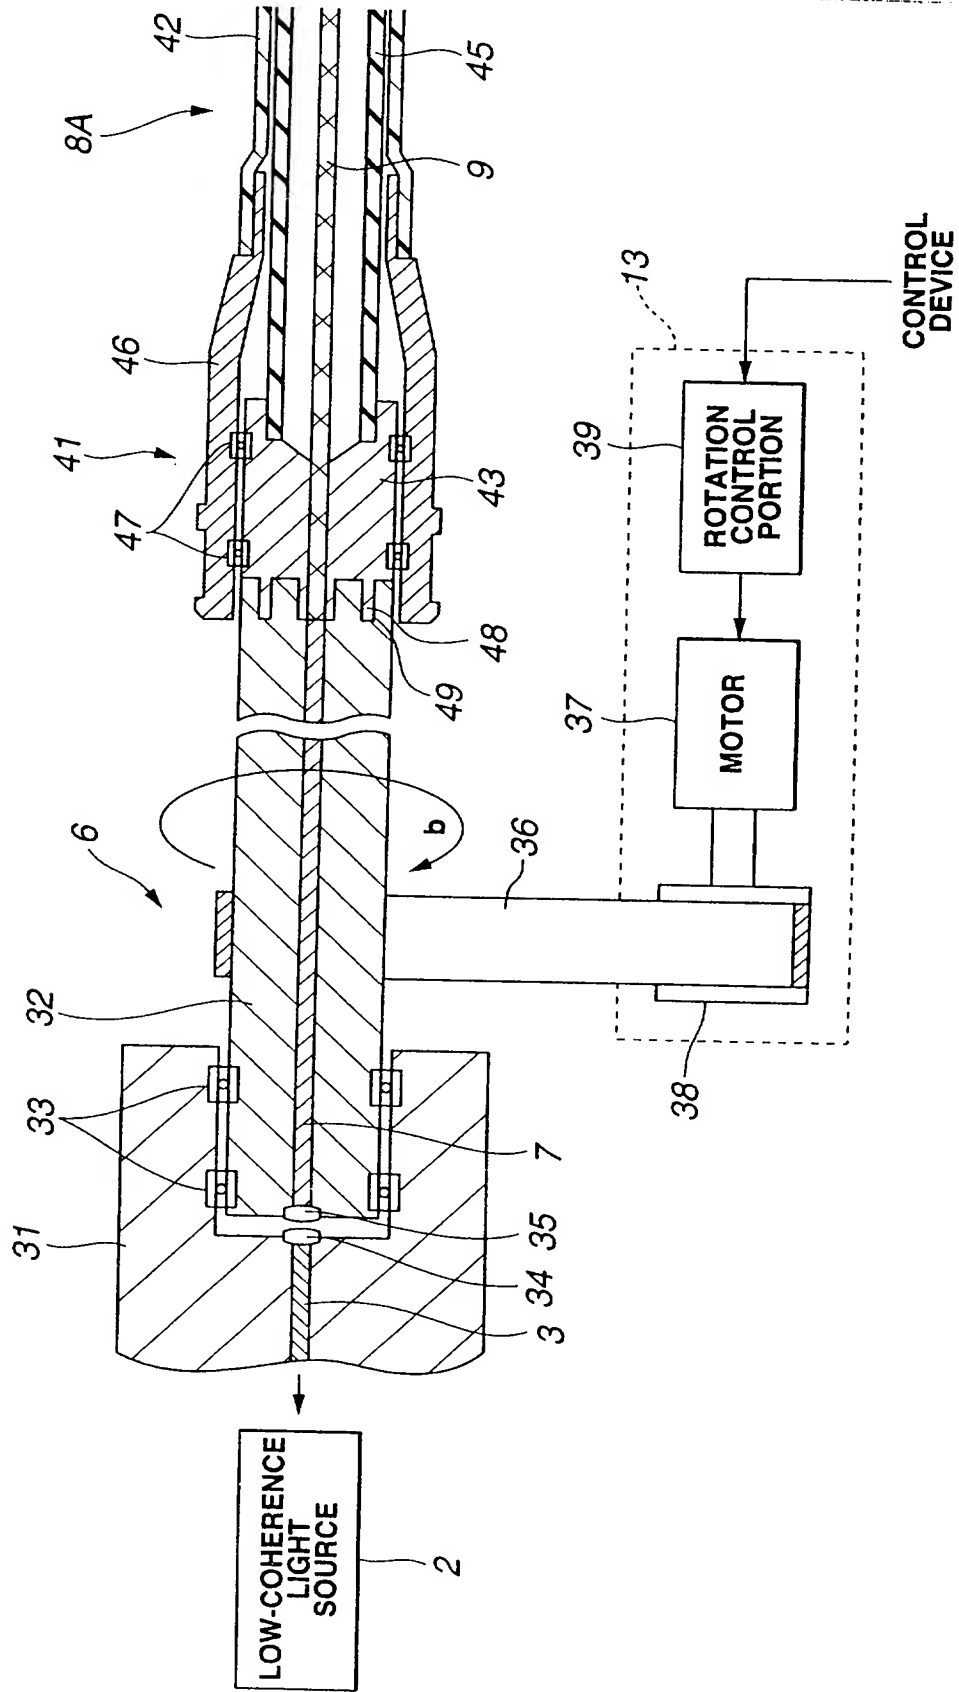


FIG.4A

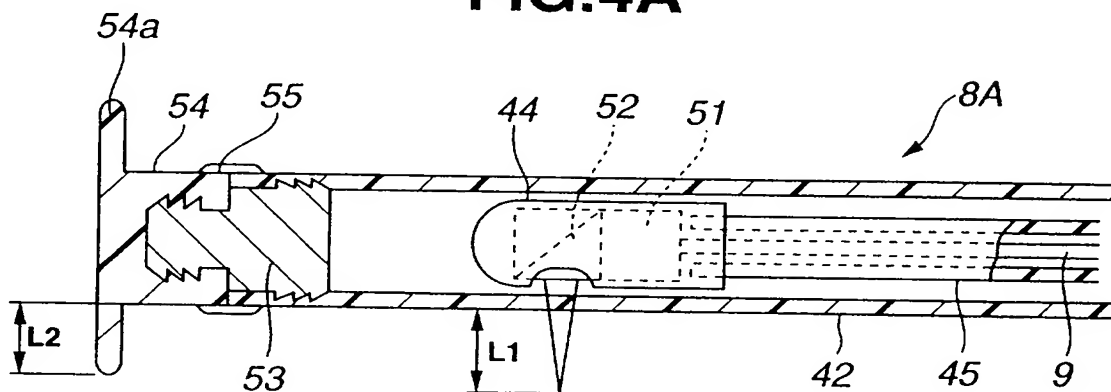


FIG.4B




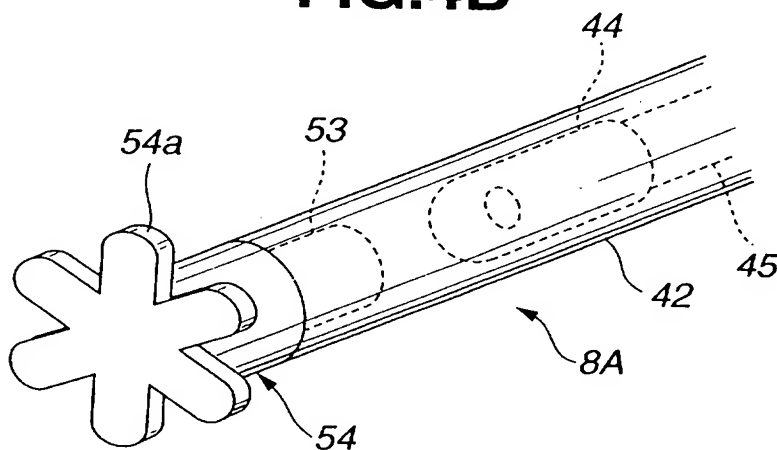


FIG.7A



**FIG.7B
(PRIOR ART)**

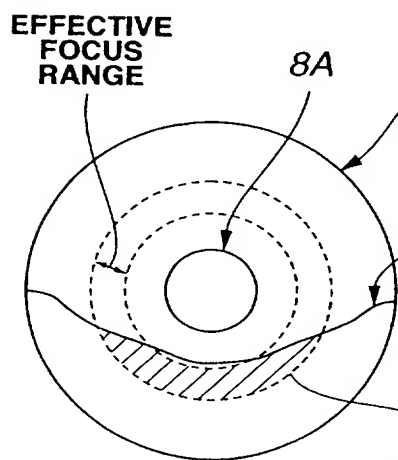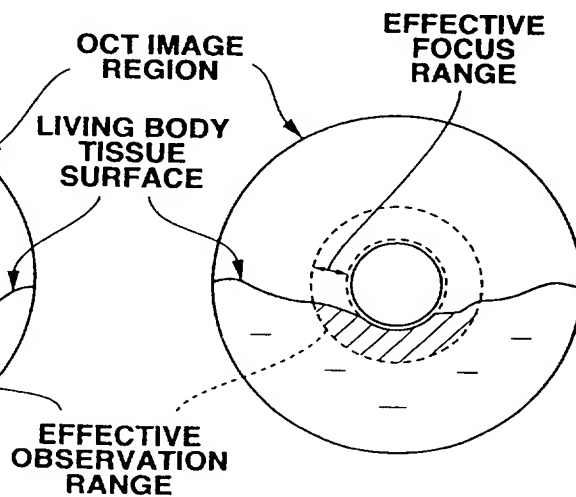



A cross-sectional view of a multi-layered structure 29. The structure consists of several horizontal layers. The top layer is labeled 29. Below it is a layer labeled 28b. A central layer is labeled 8A. Within this central layer, there are several components: a component labeled 28a on the left, a component labeled 54a in the middle, a component labeled 54 below 54a, a component labeled 53 below 54, a component labeled 44 on the right, a component labeled 45 below 44, and a component labeled 42 at the bottom right. The layers are separated by thin lines, and the components are shown in cross-section.



IN THE OFFICE OF PAPERS
AND PATENT OFFICE

FIG.6A

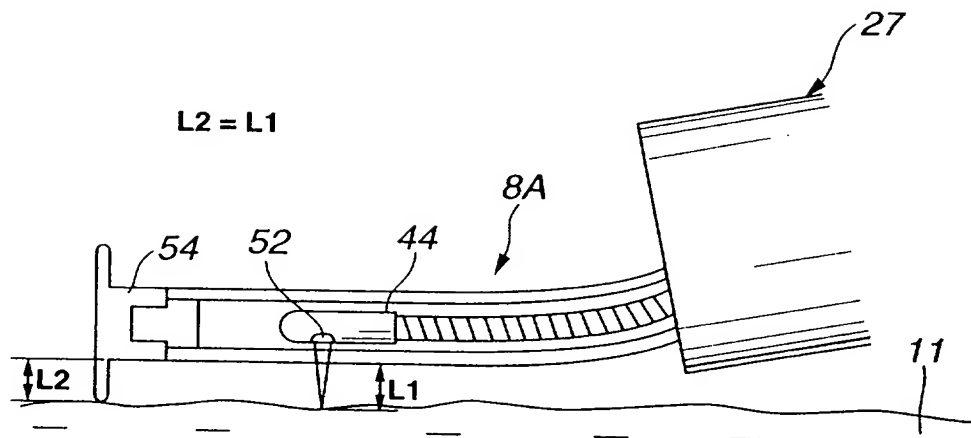


FIG.6B

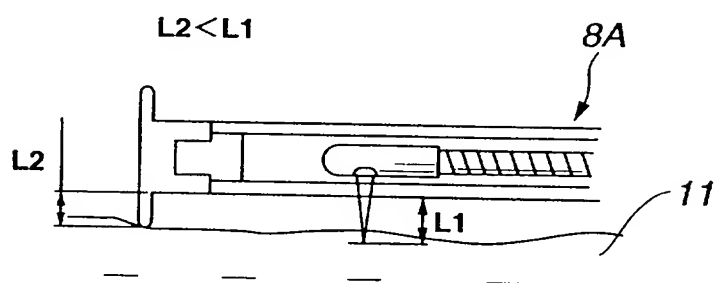


FIG.6C

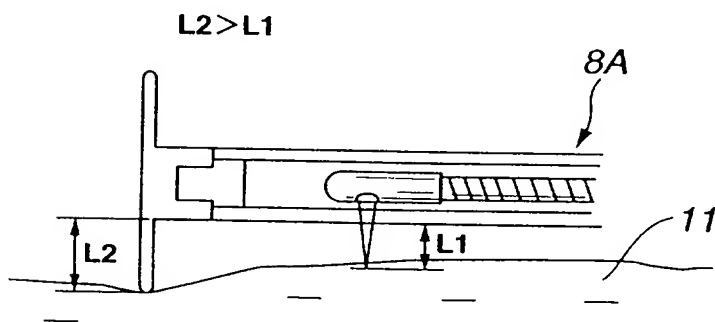


FIG.8

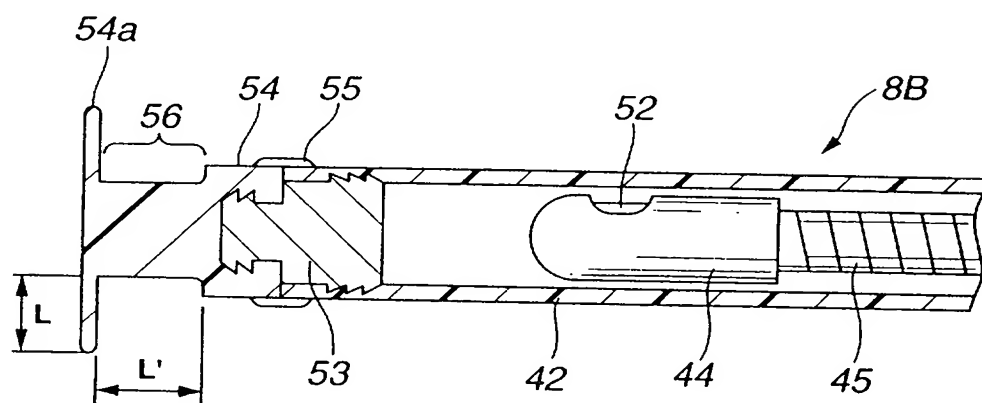


FIG.9

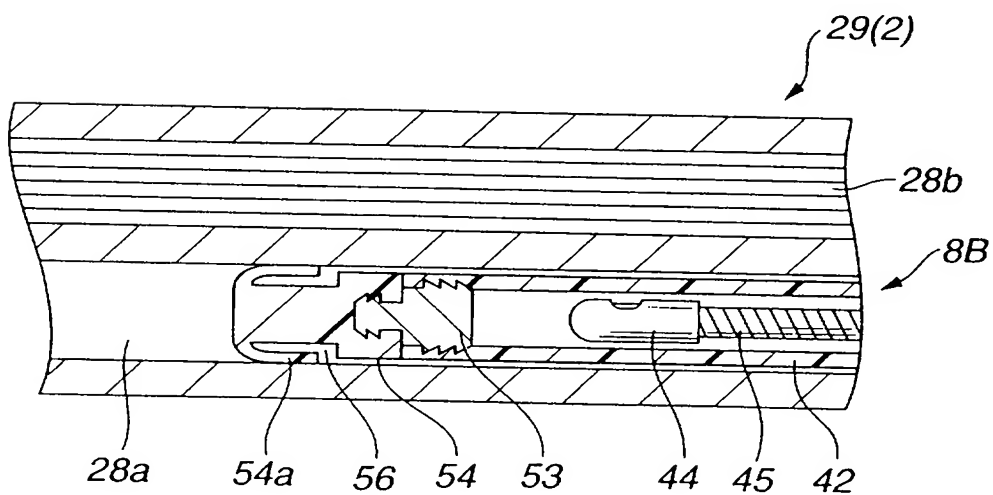


FIG.10

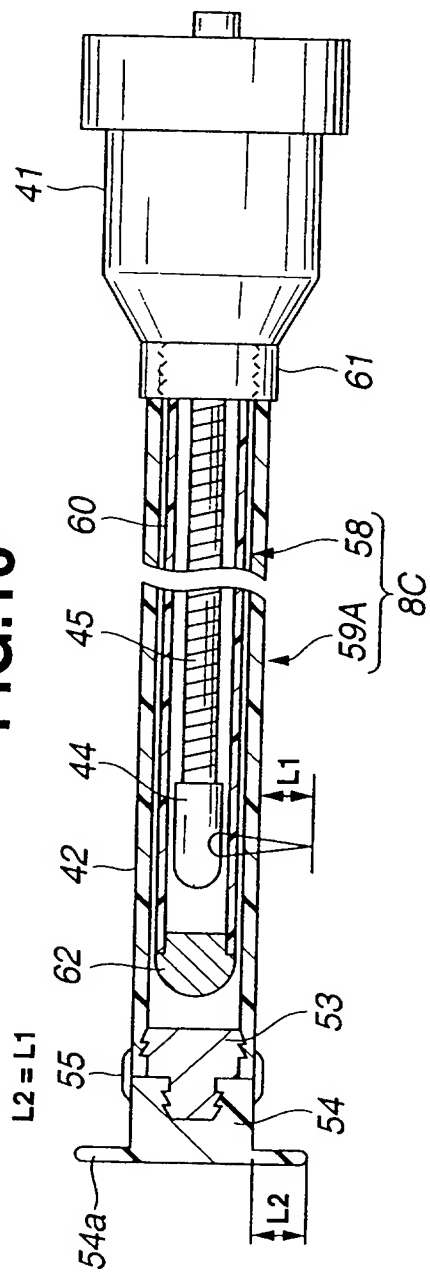


FIG.11

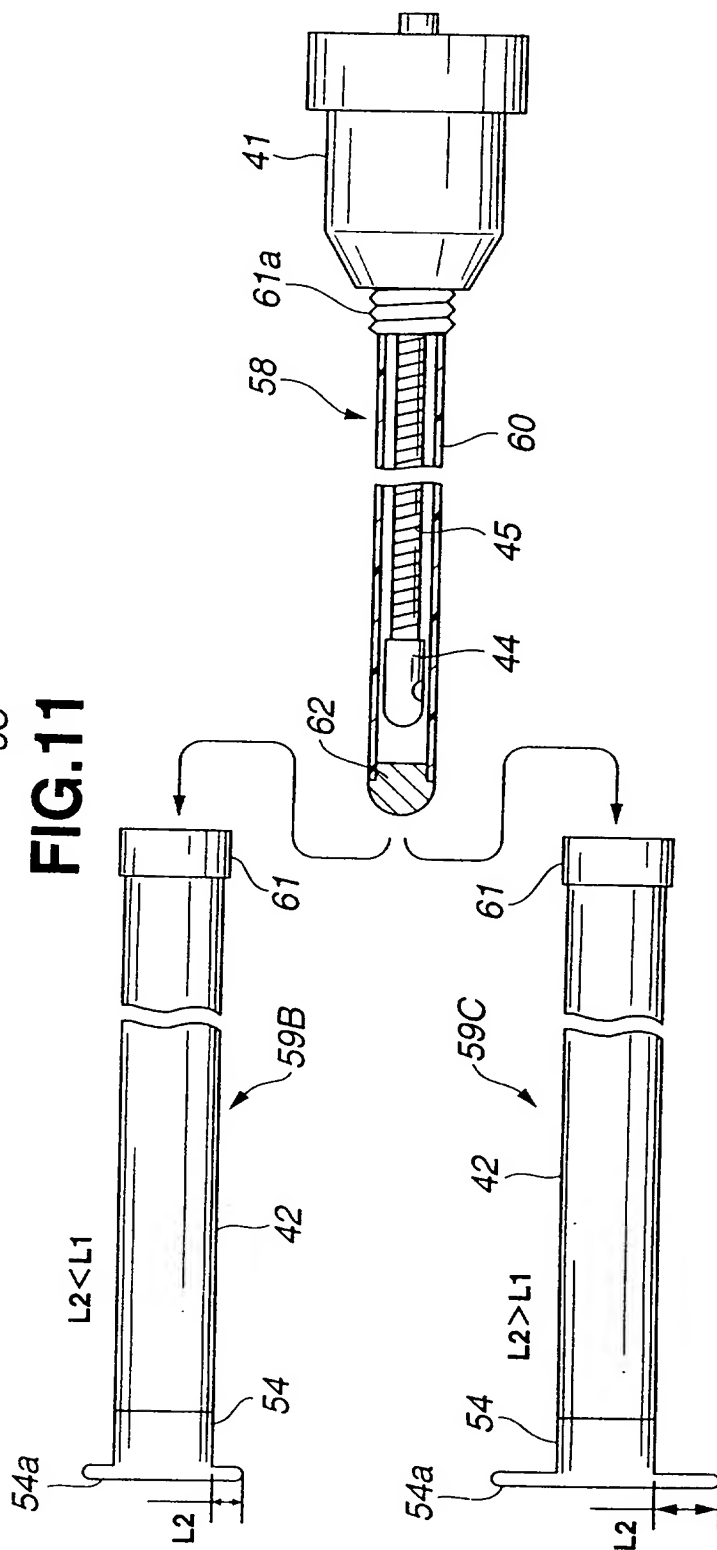


FIG.12

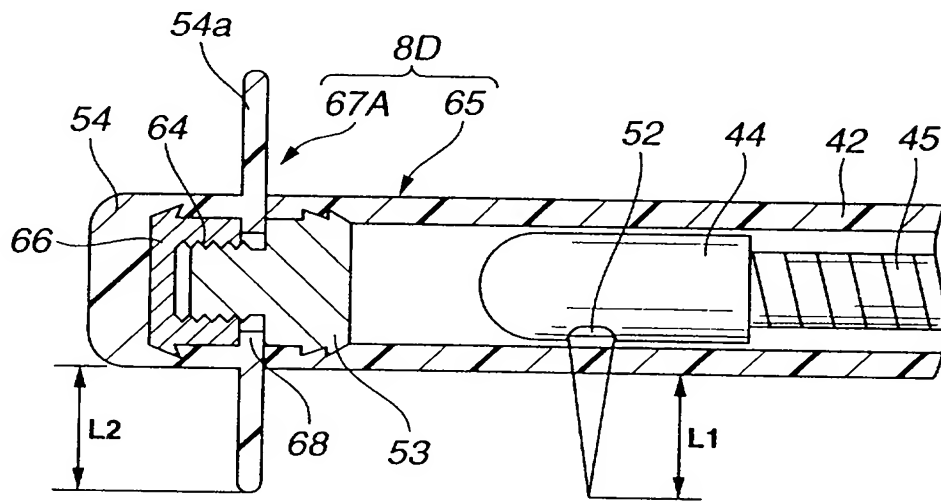


FIG.13

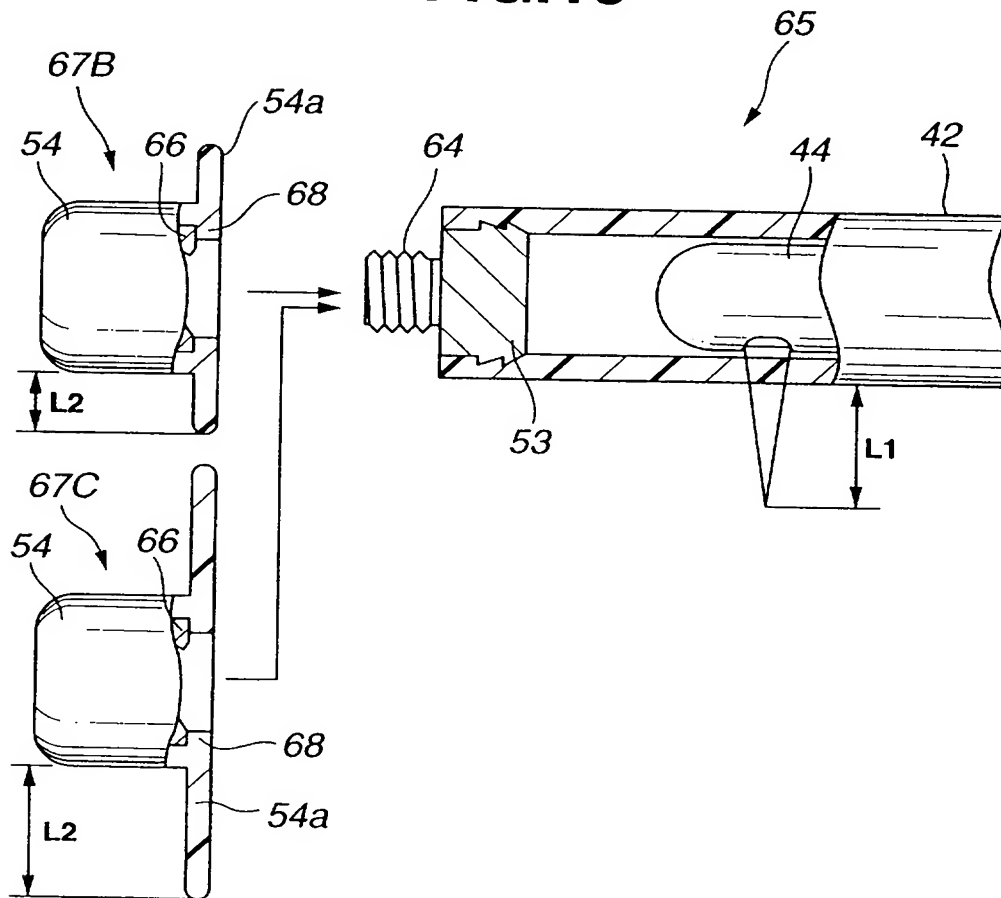


FIG.14

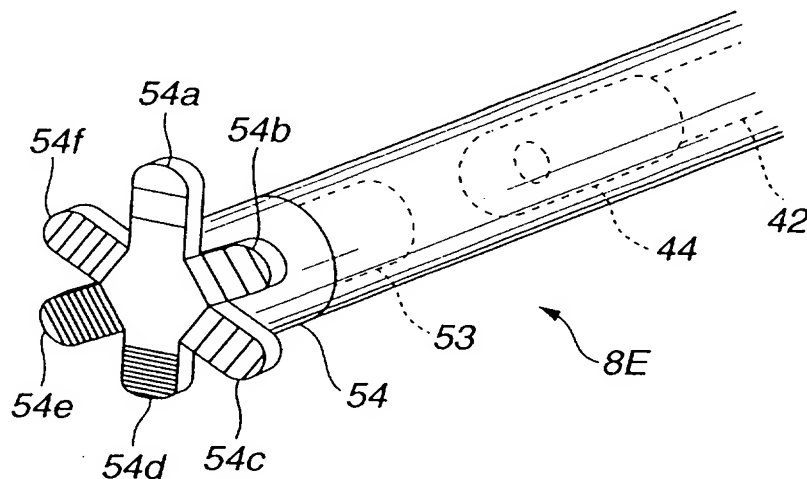


FIG.15

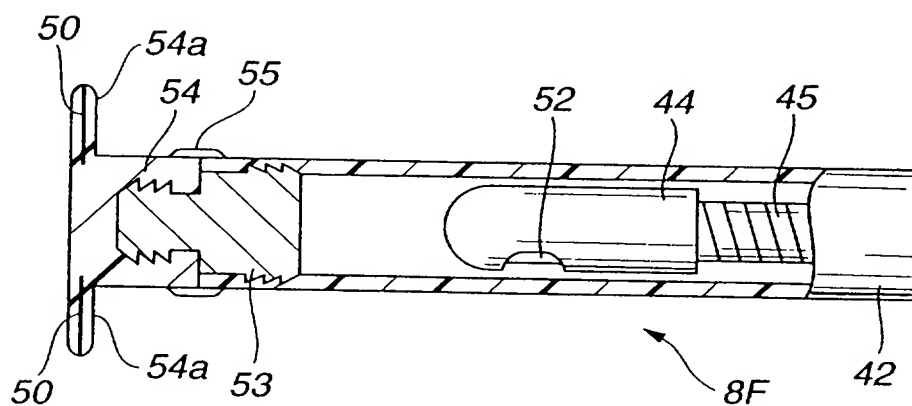


FIG.16A


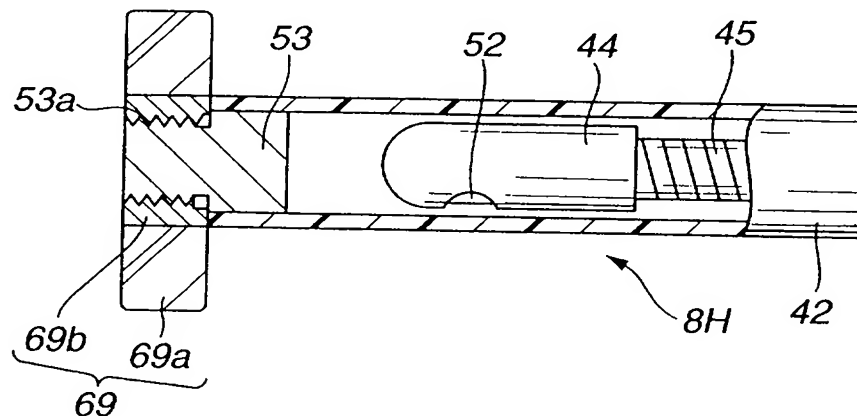


FIG.16B

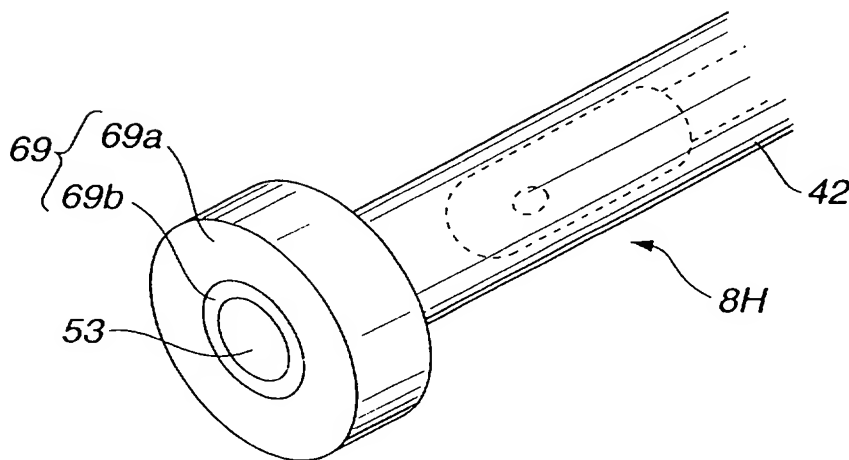

OIP & JC37
 AUG 13 2002
 PATENT & TRADEMARK OFFICE

1. TWO OF PAPERS
 2. TWO OF FILLED

FIG.17

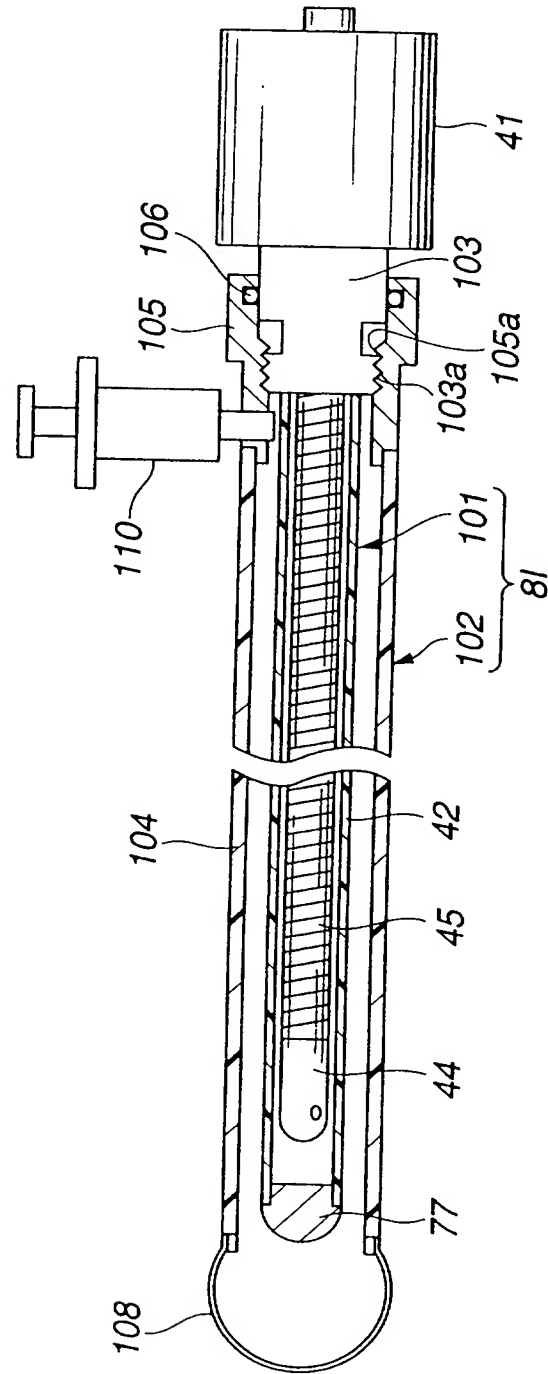


FIG.18

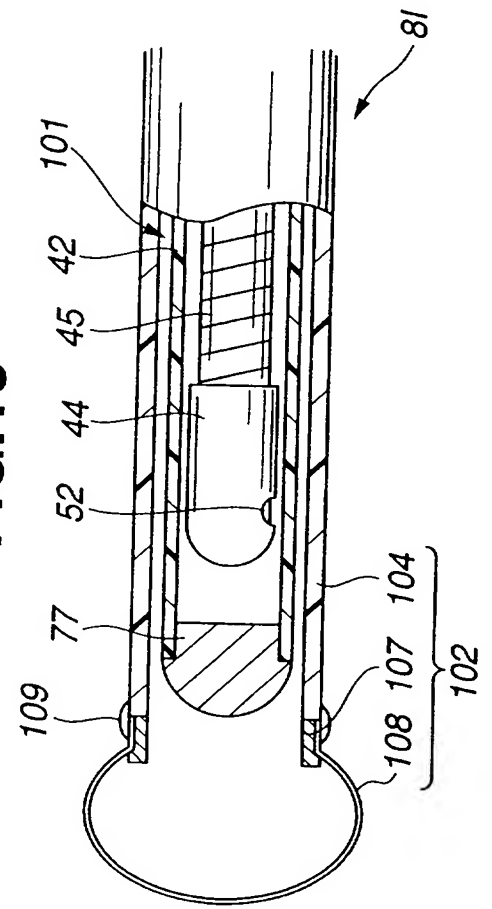


FIG.19

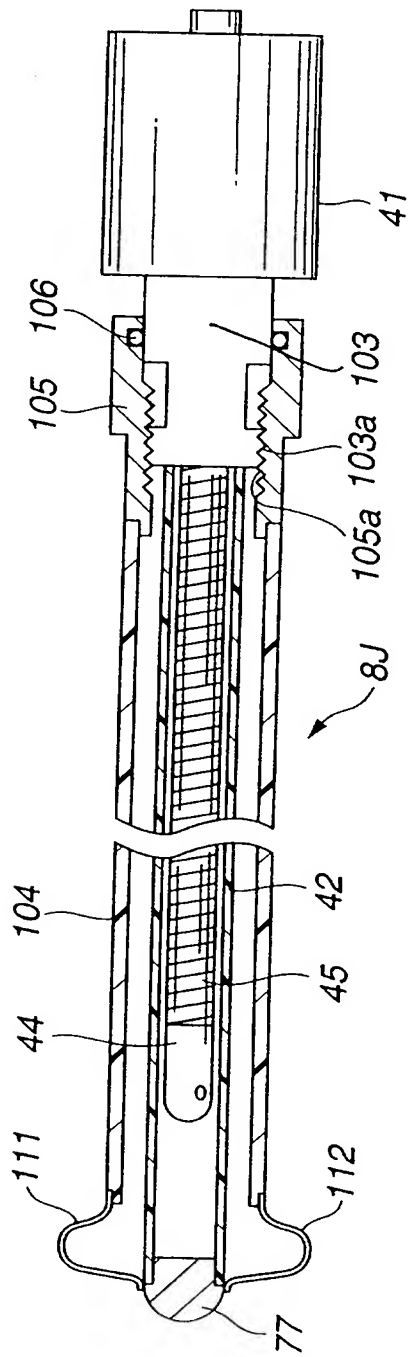


FIG.20

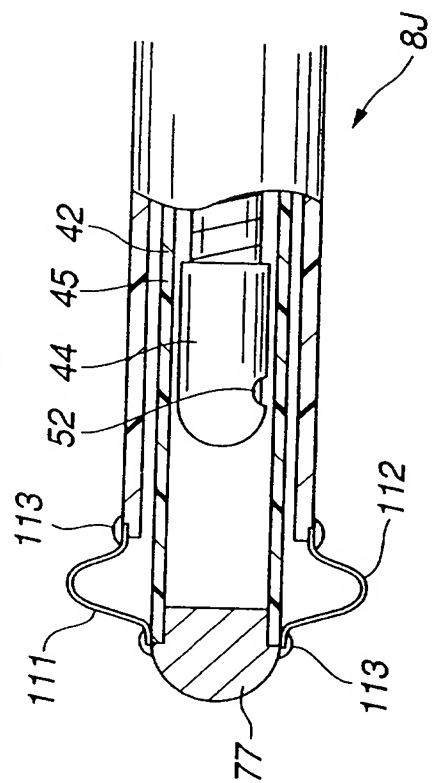


FIG.21

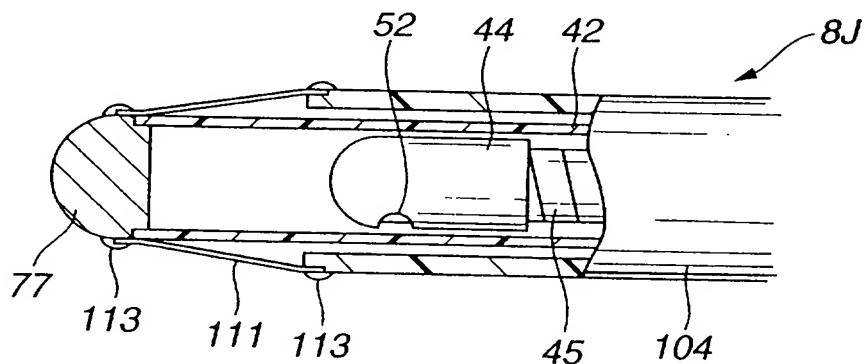


FIG.24

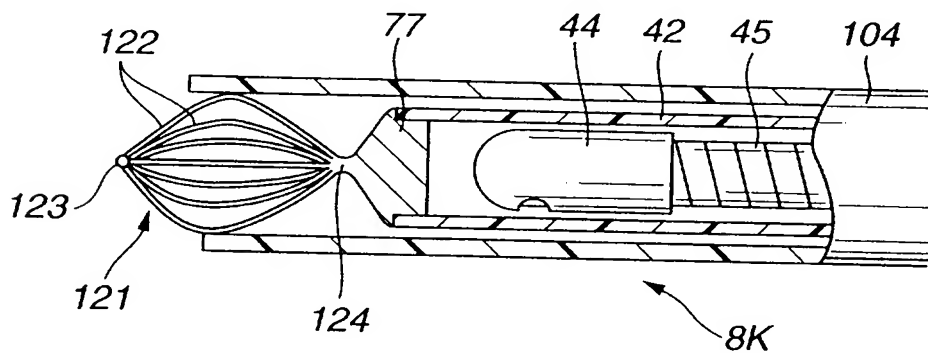


FIG.25

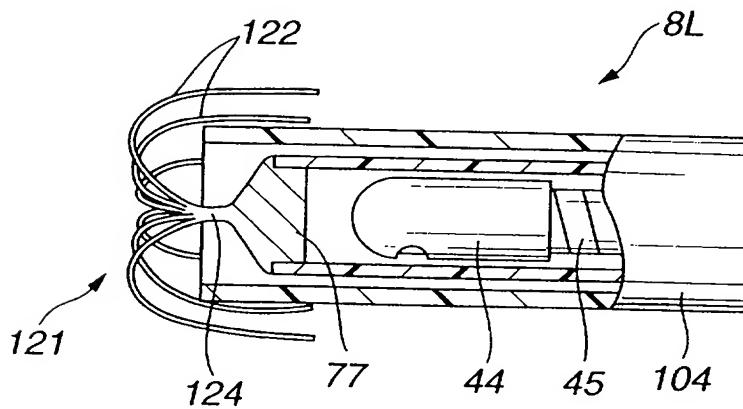


FIG. 22

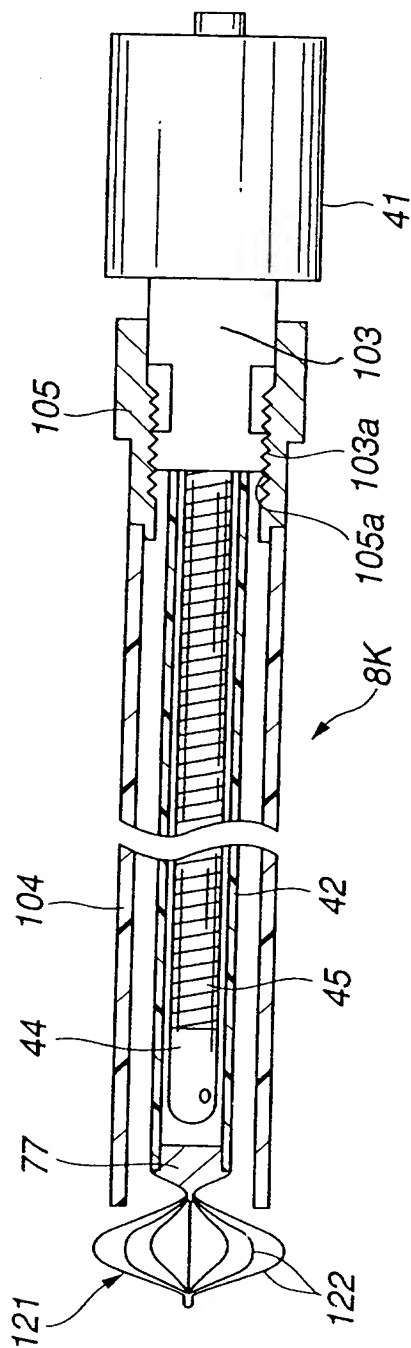


FIG. 23

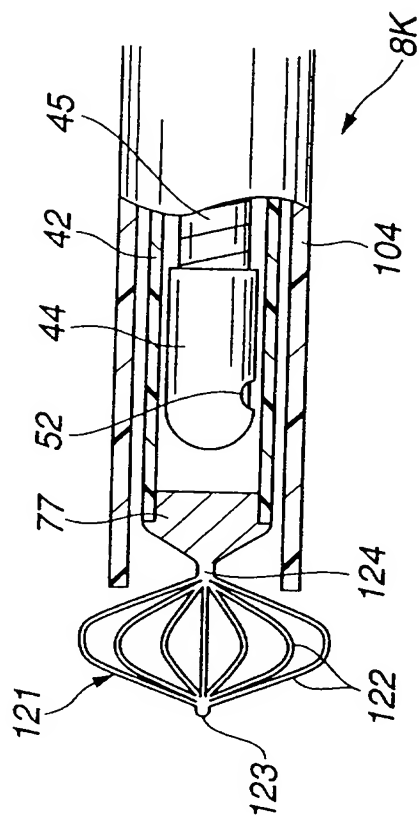


FIG.26

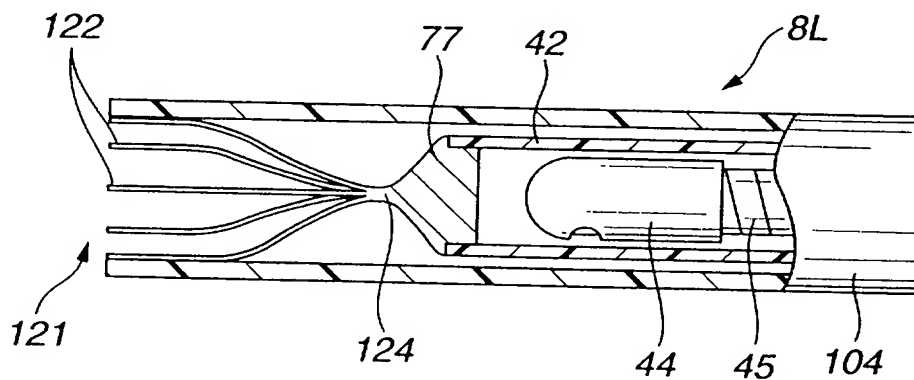


FIG.27

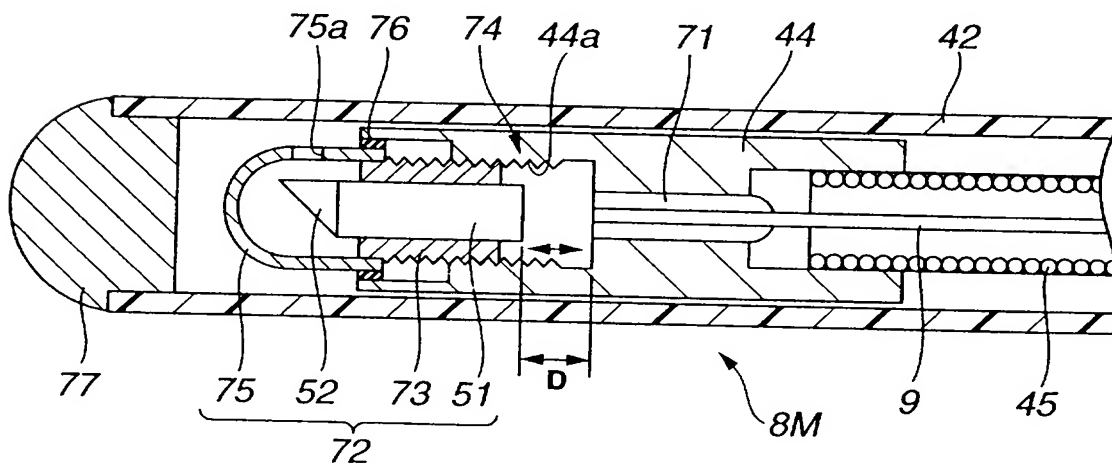


FIG.28

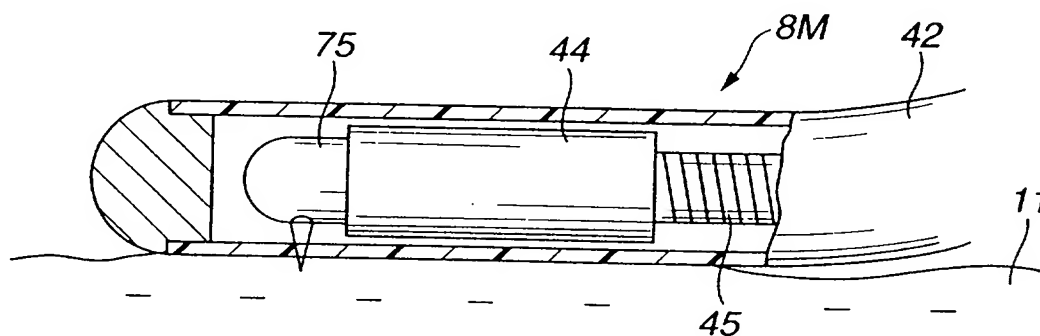


FIG.29

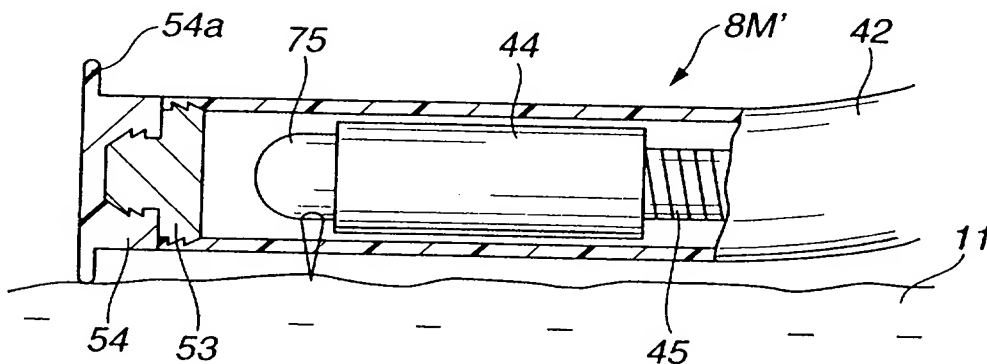


FIG.30

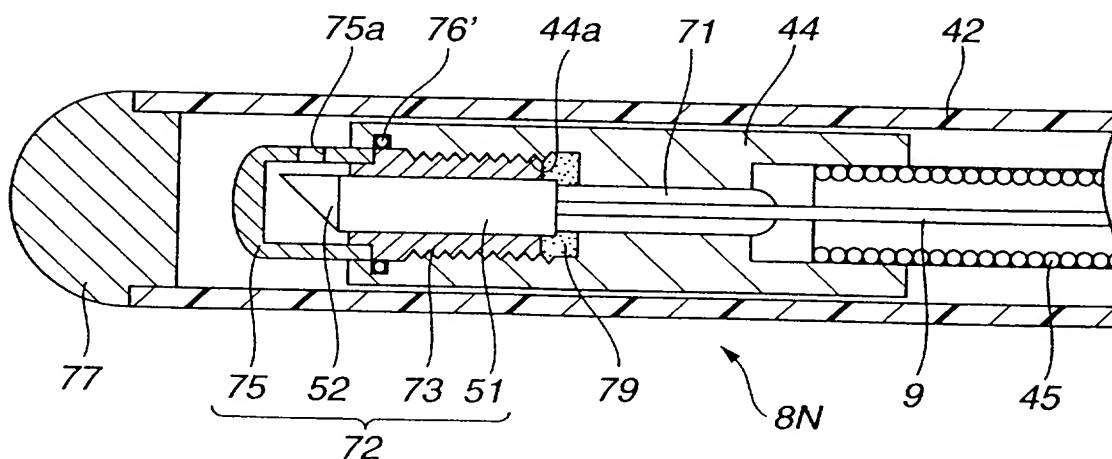


FIG.31A


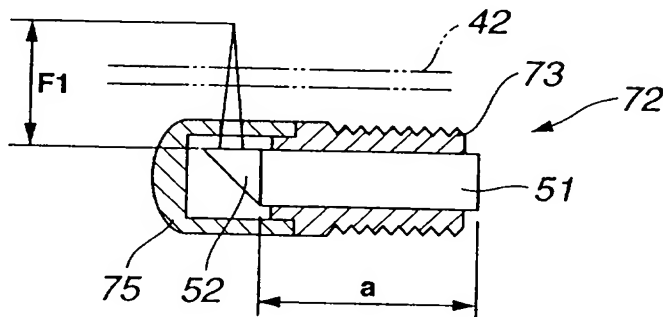


FIG.31B

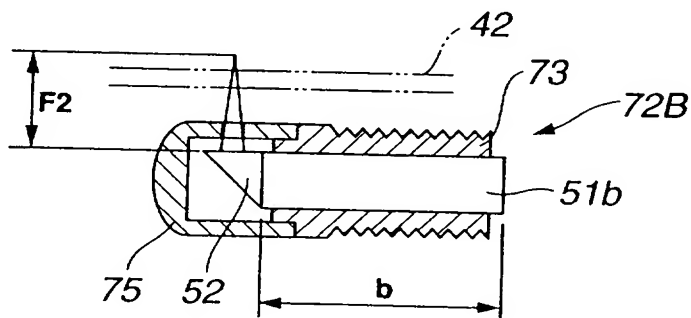

$$a < b \Rightarrow F1 > F2$$

FIG.32

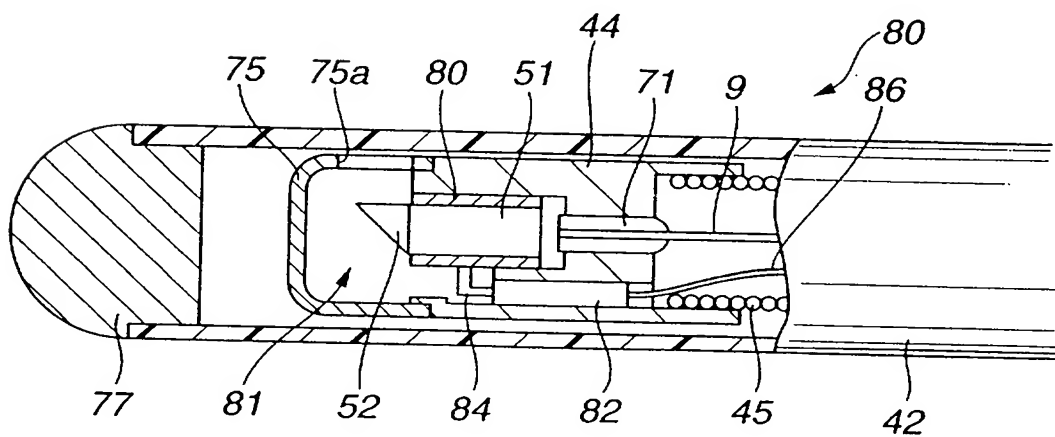


FIG.33

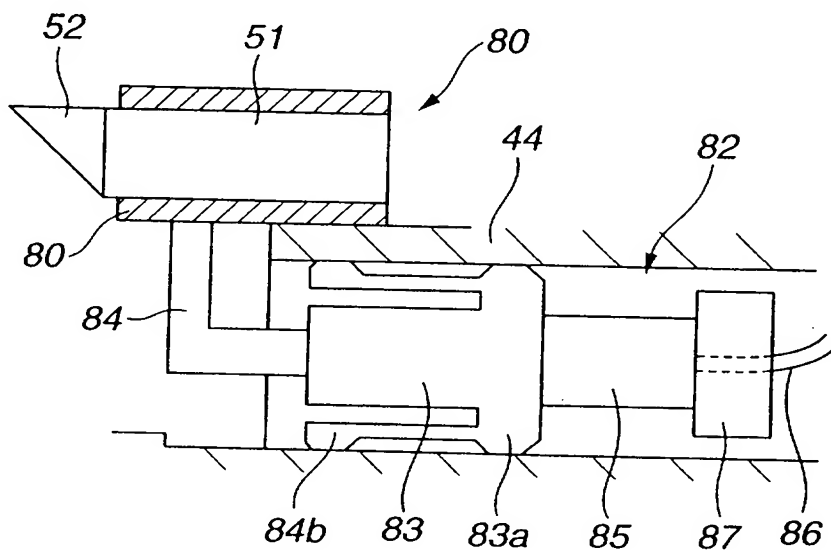


FIG.34

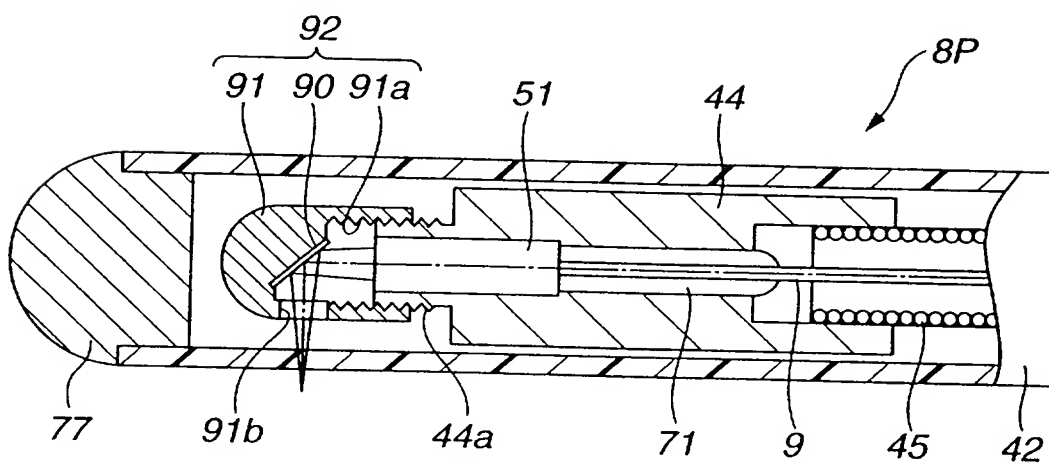


FIG.35

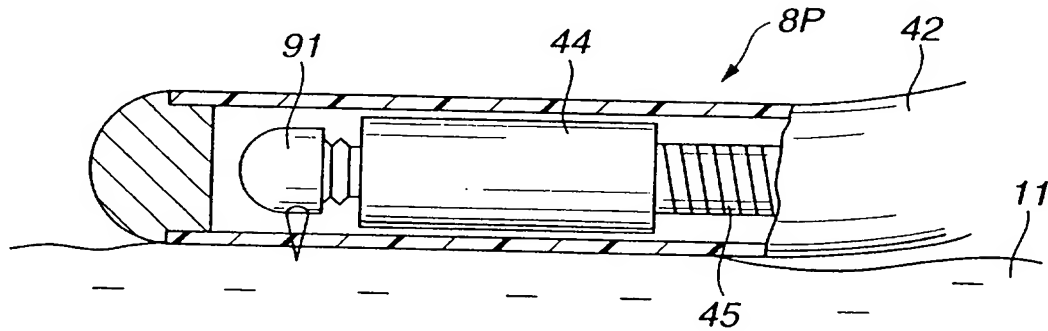


FIG.36

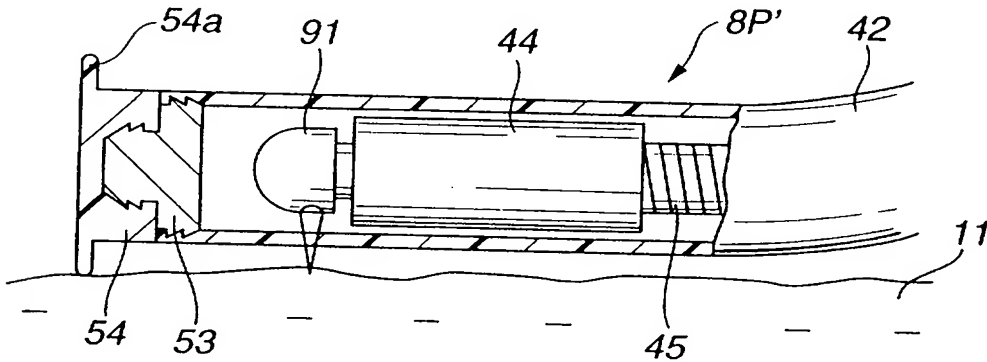


FIG.37

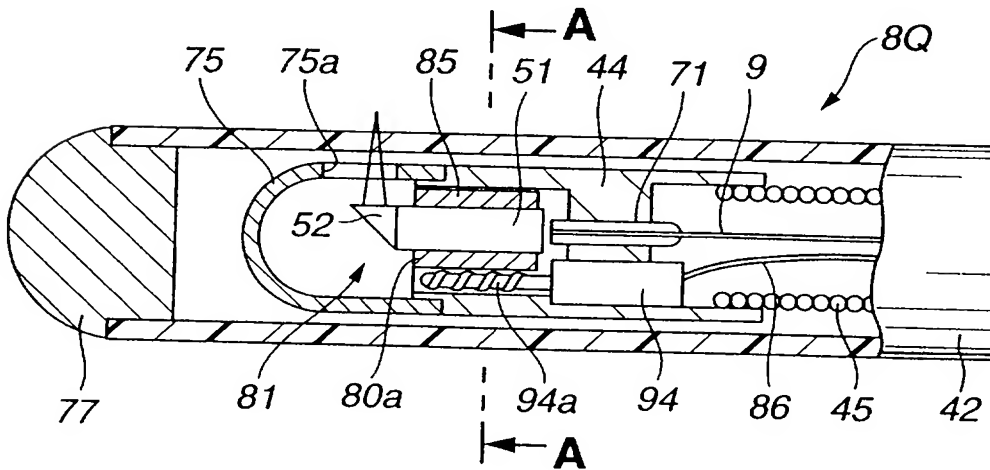


FIG.38

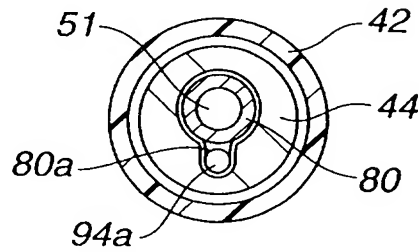


FIG.39


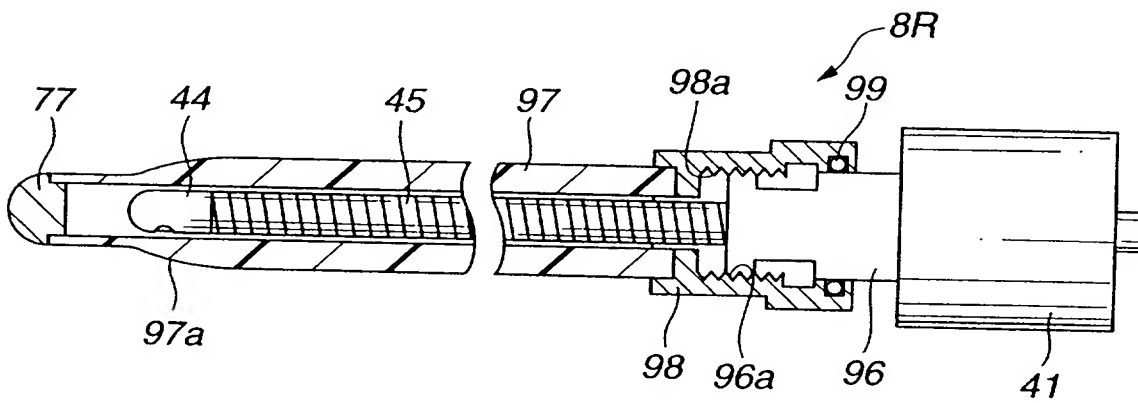


FIG.40

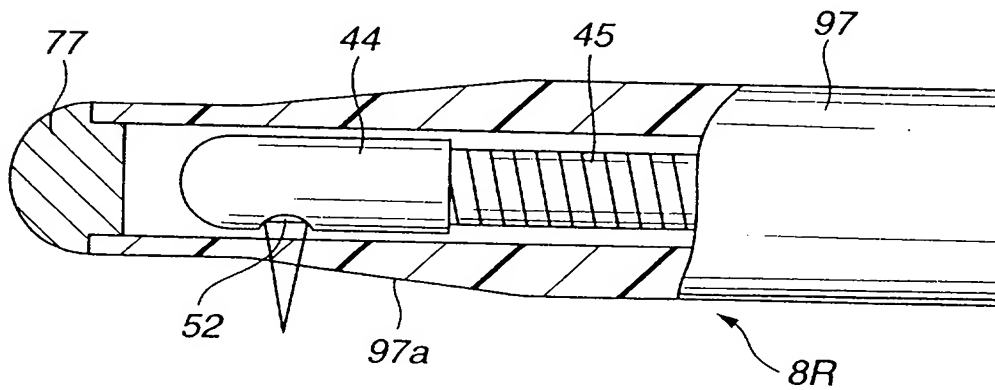

U.S. PAT. & TRADEM. OFF.
AUG 13 2002

U.S. DEPT. OF COMMERCE
PATENT & TRADEM. OFF.

FIG.41

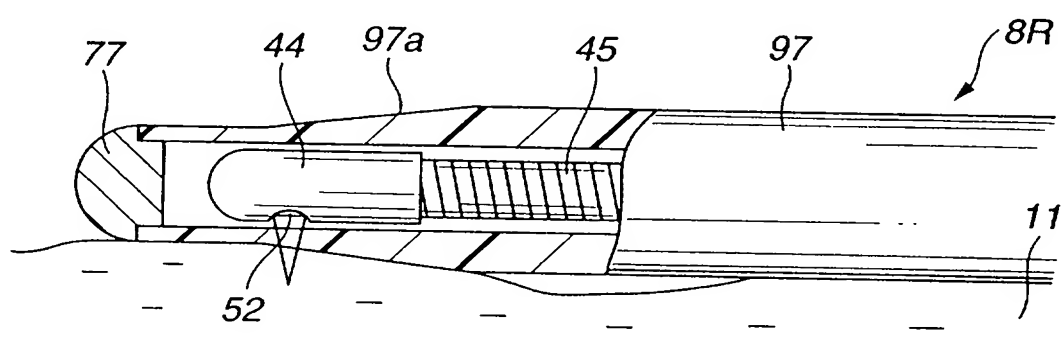


FIG.42

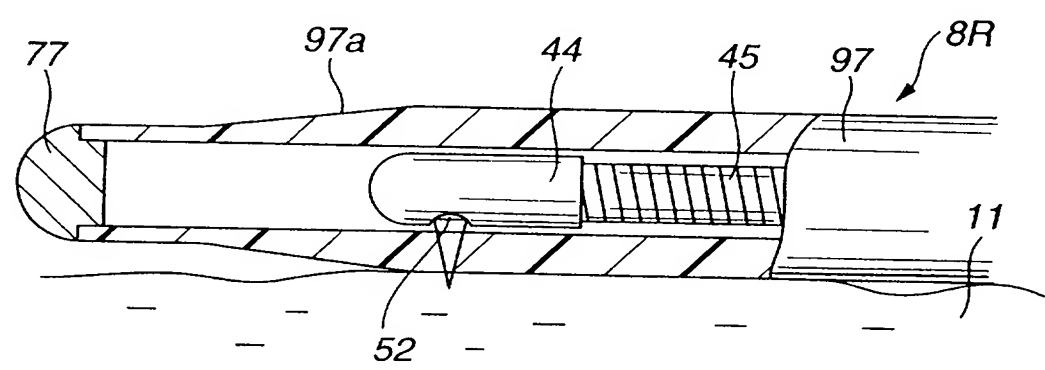


FIG.43A

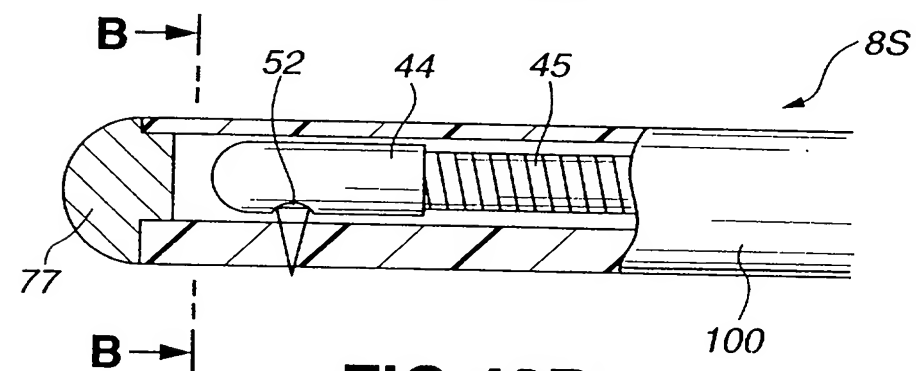


FIG.43B




FIG.44A

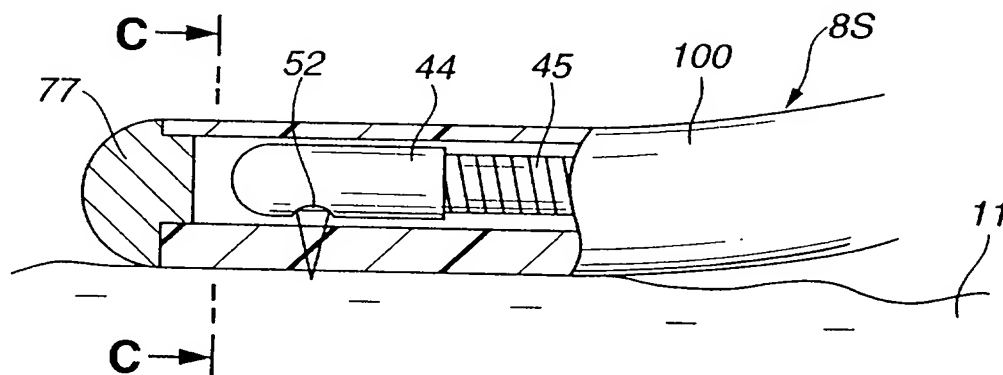


FIG.44B

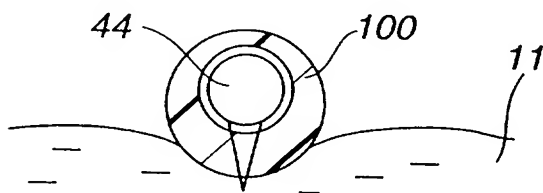


FIG.45A

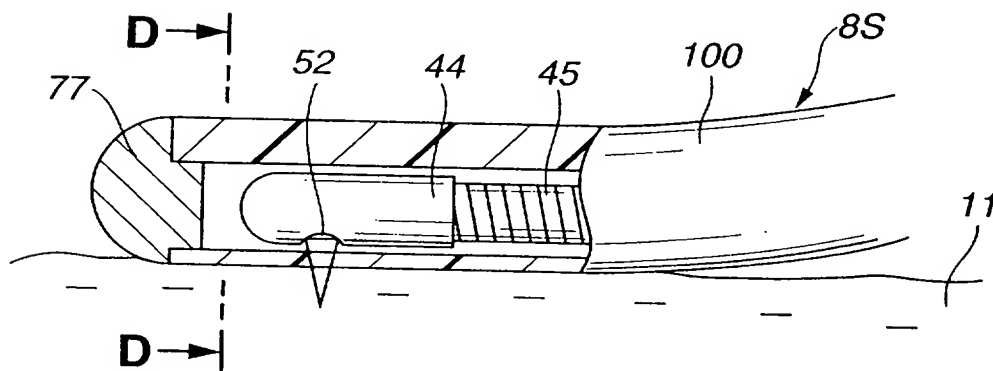


FIG.45B



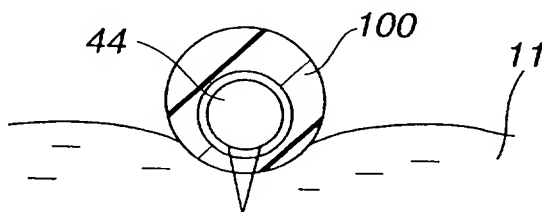



FIG. 46

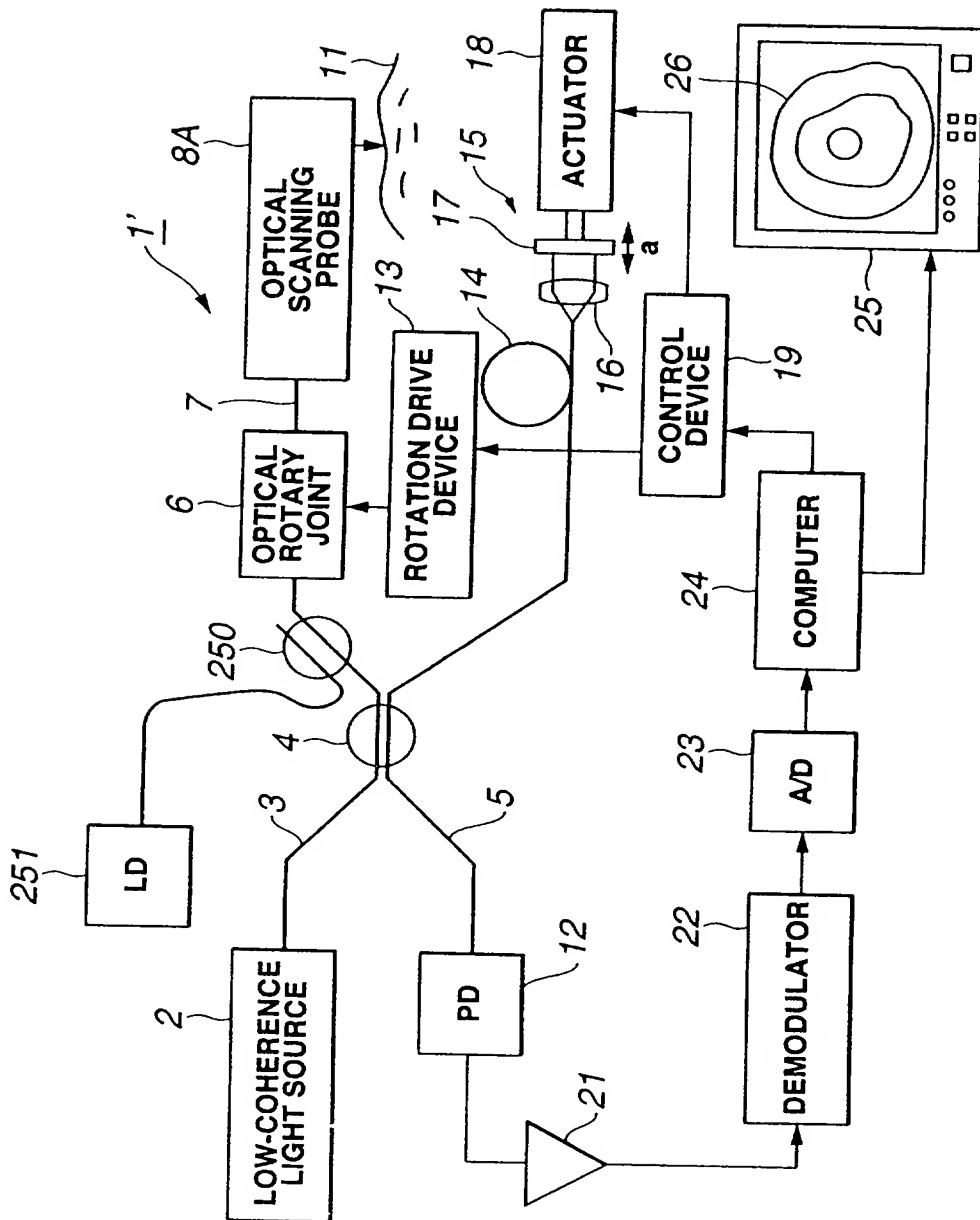



JOHN W. PETERS
ATTORNEY

FIG.47

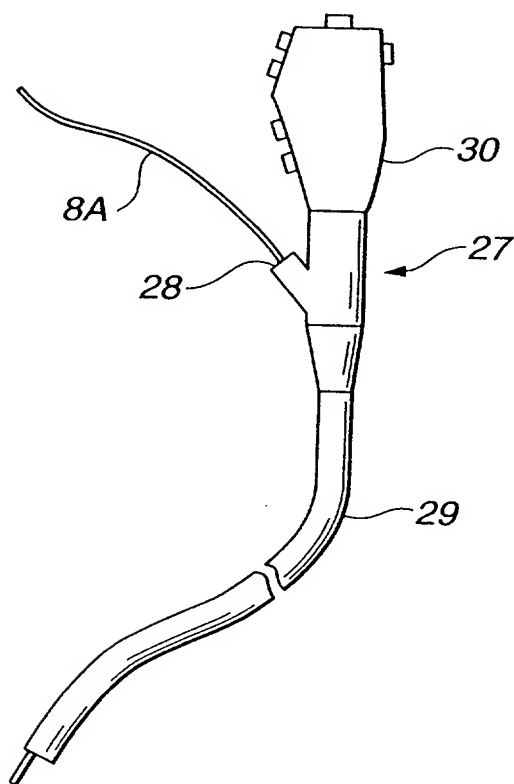



2002-08-13 09:25:00
2002-08-13 09:25:00

FIG.48B




FIG.48A

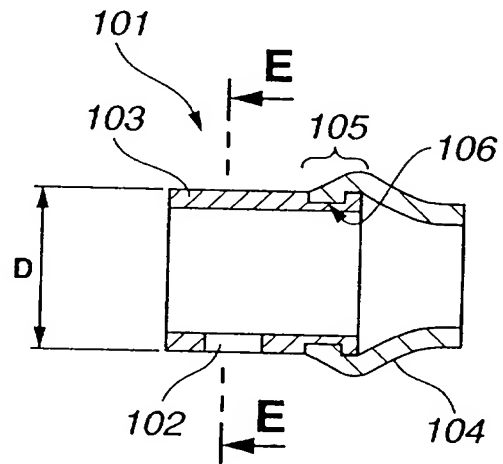


FIG.49

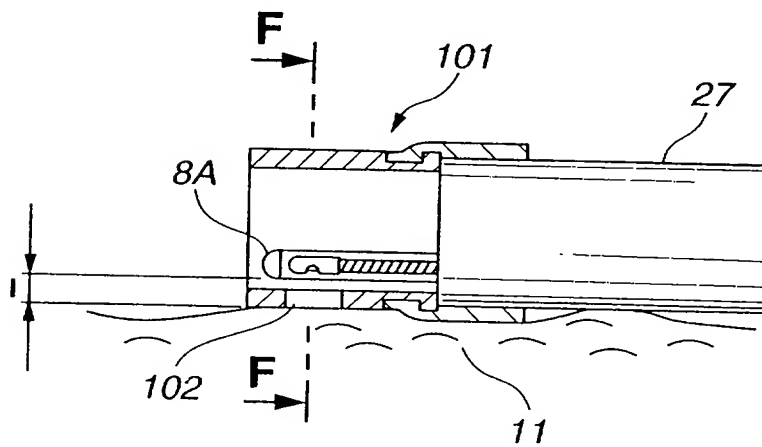


FIG.50

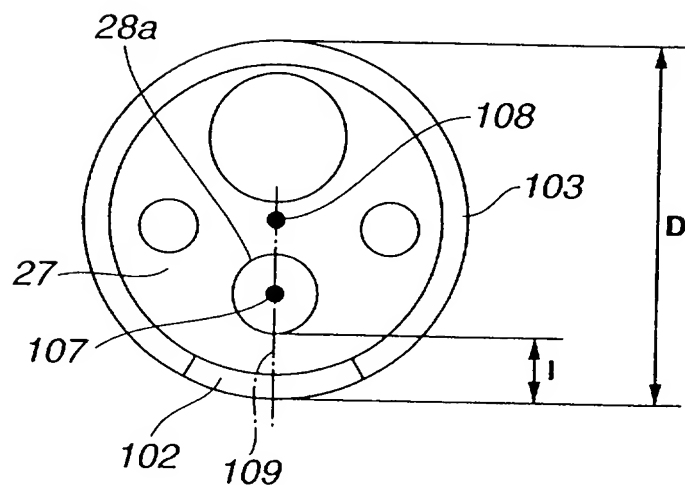


FIG.51

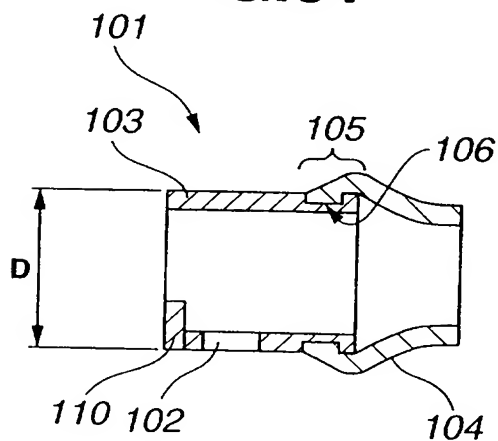


FIG.52B






FIG.52A

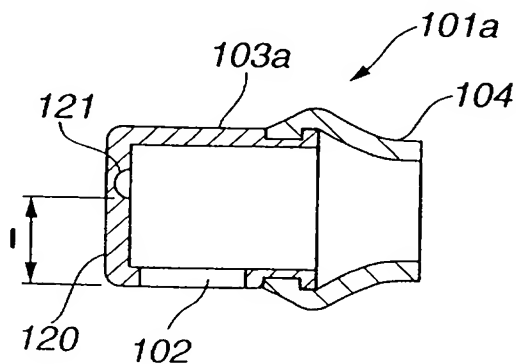



COPIES OF PATENTS
NOT FOR SALE

FIG.53

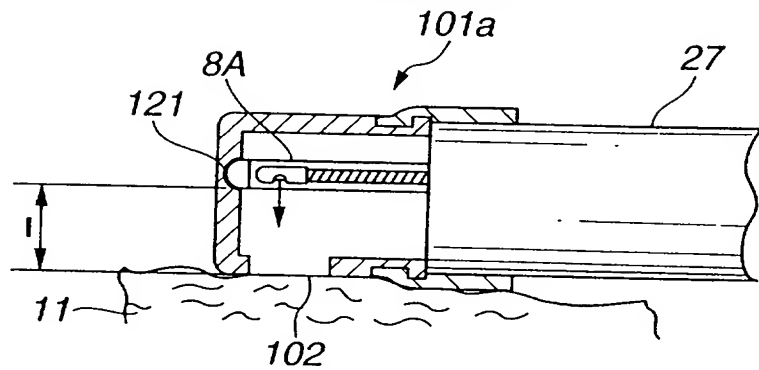


FIG.54

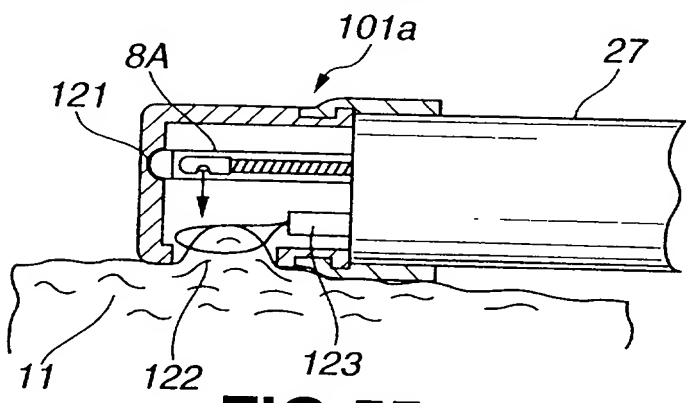


FIG.55

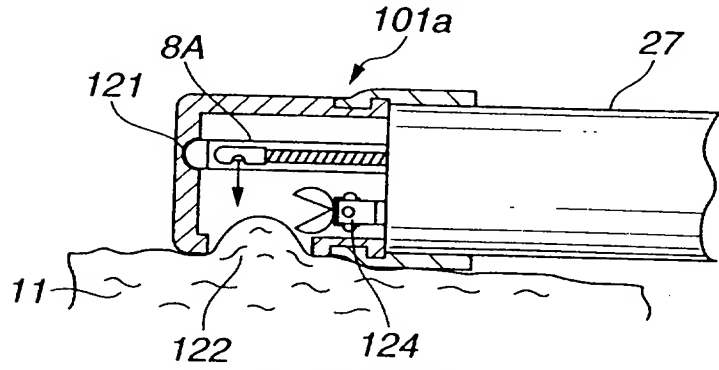


FIG.56

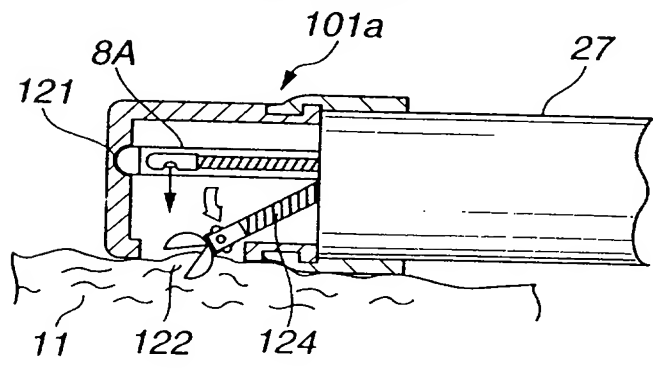


FIG.57

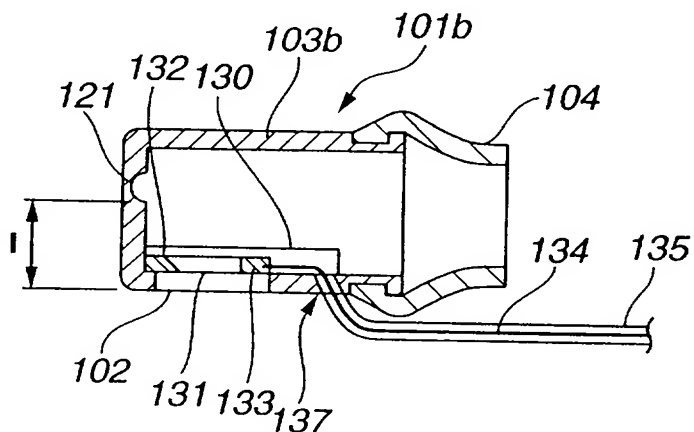


FIG.58



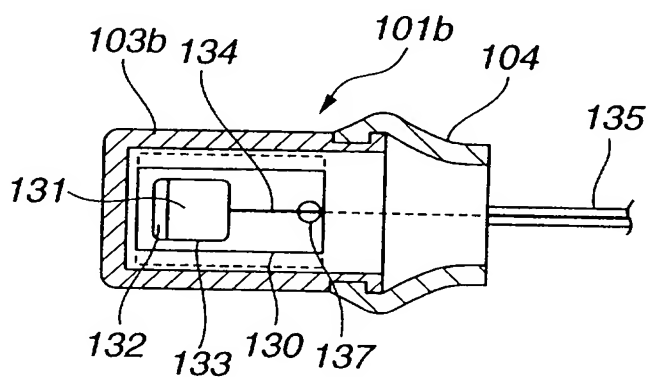


FIG.59

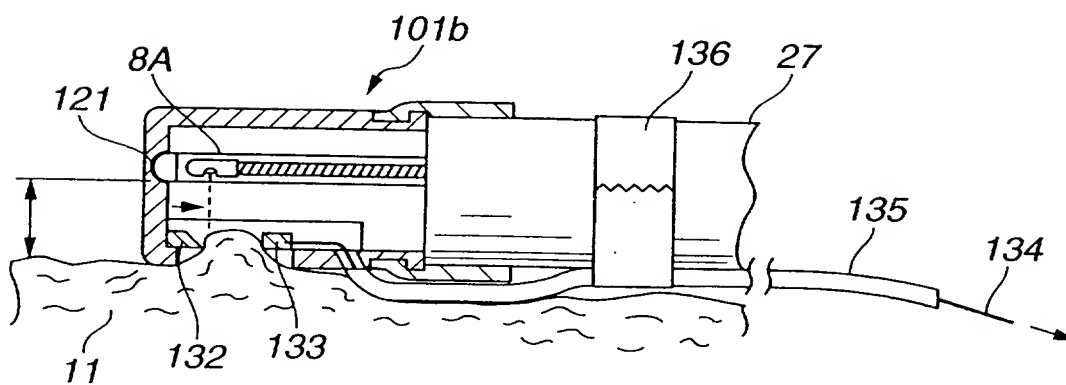



U.S. PATENT & TRADEMARK
OFFICE

FIG.60B




FIG.60A

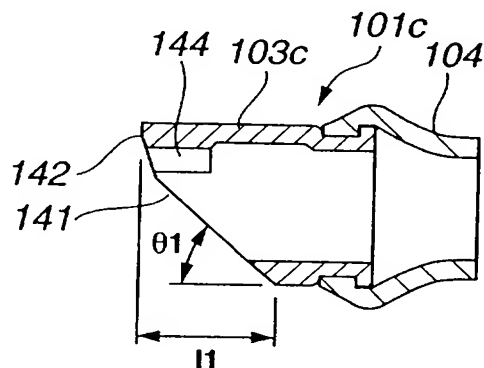


FIG.61

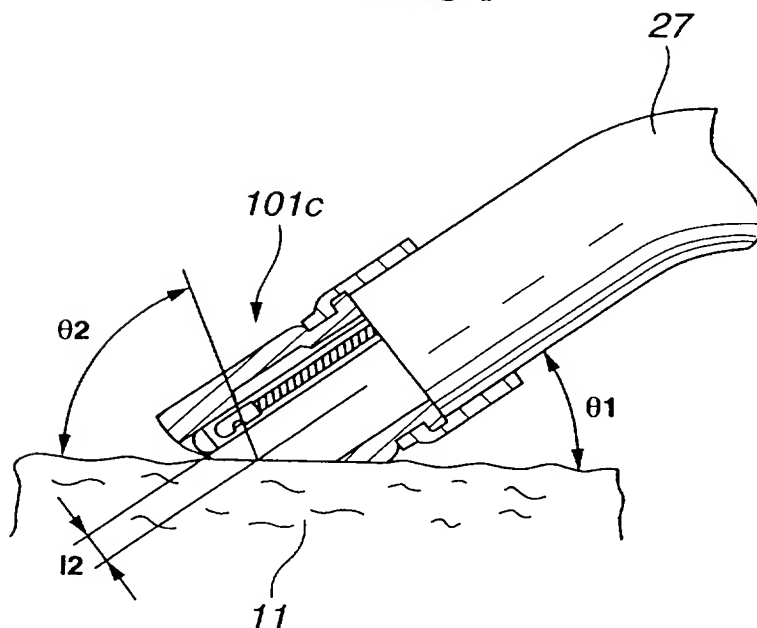


FIG.62B




FIG.62A

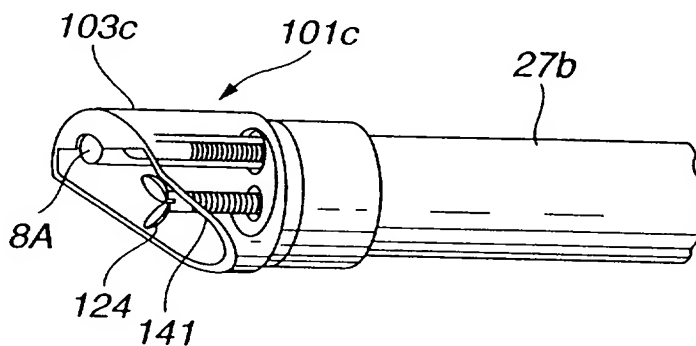


FIG.63




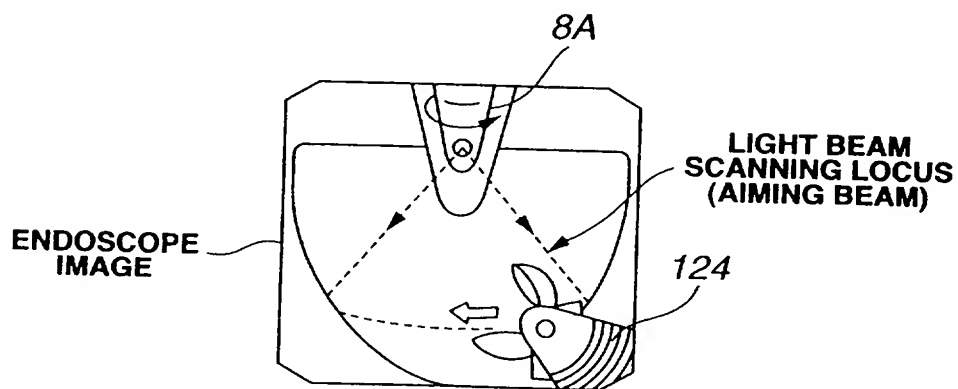


FIG.64

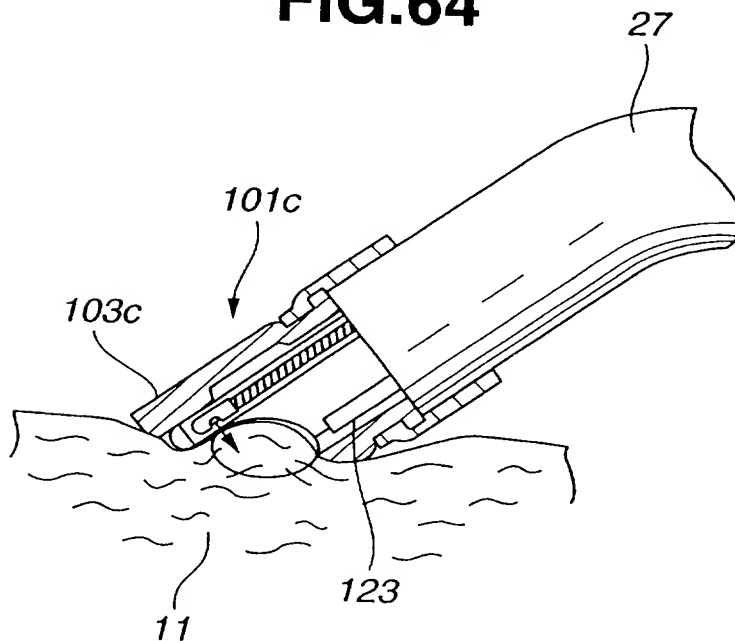

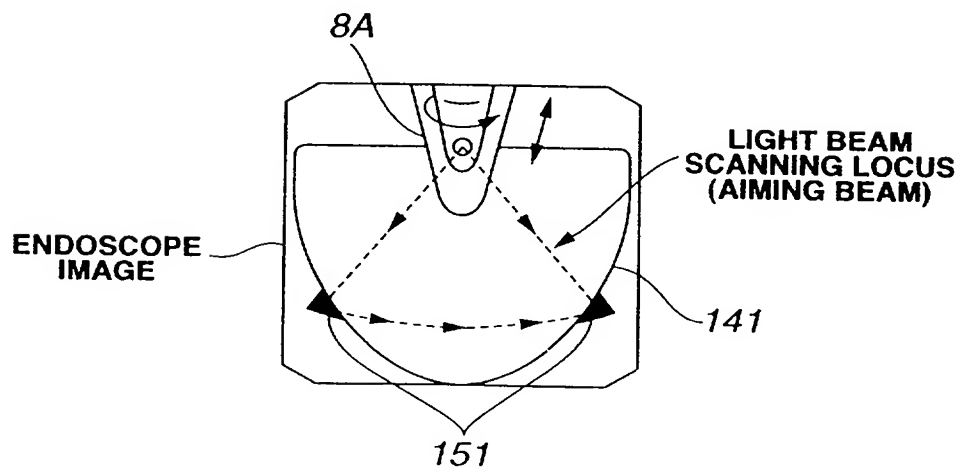



U.S. PATENT & TRADEMARK OFFICE

FIG.68B




FIG.68A



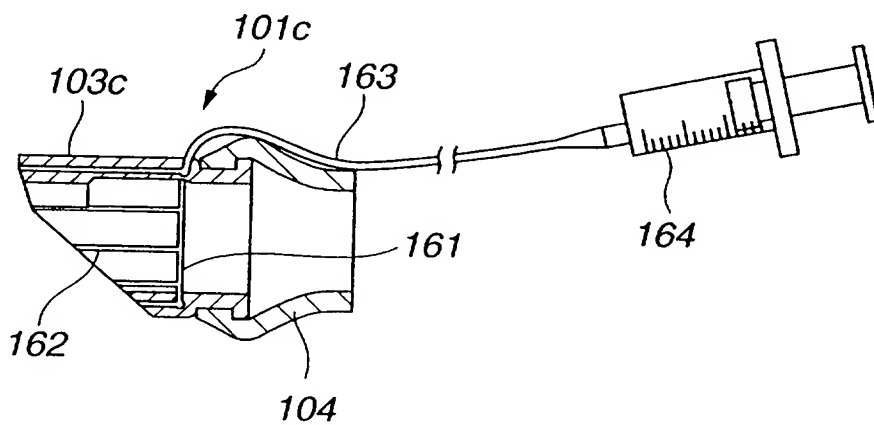


FIG.69

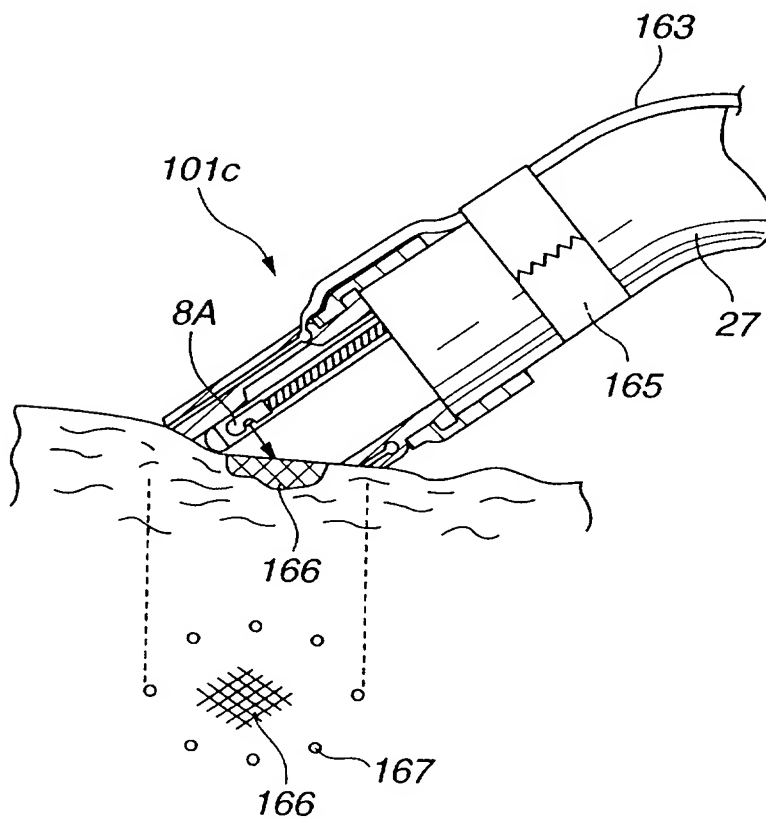



U.S. PATENT & TRADEMARK OFFICE
WASHINGTON, D.C. 20540

FIG.70A


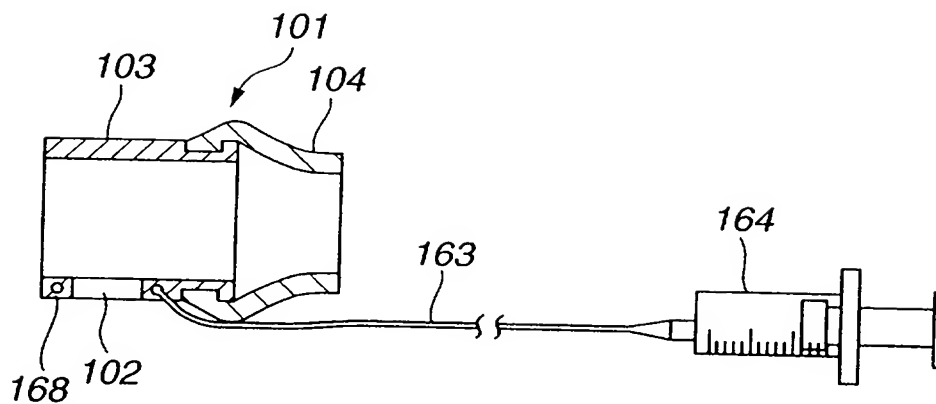


FIG.70B



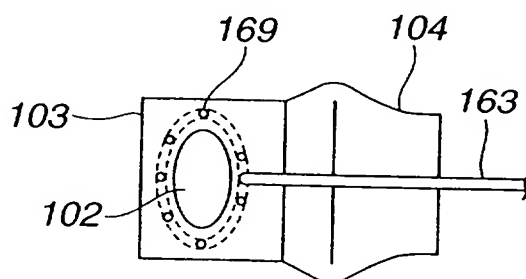

COPIES PAPERS
NOT FOR SALE

FIG.71


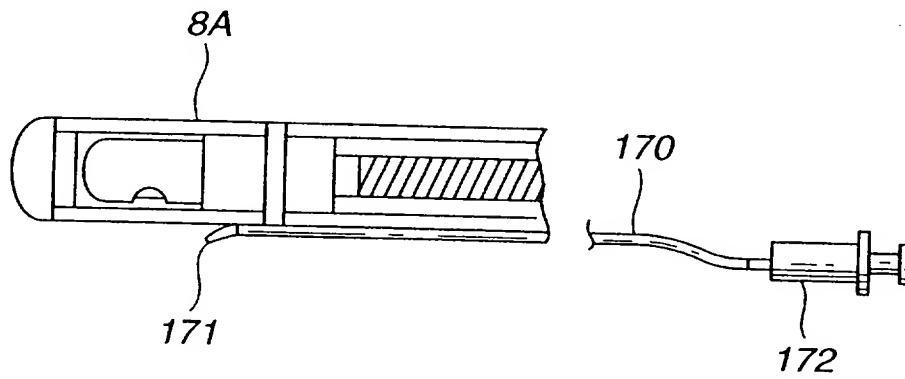


FIG.72



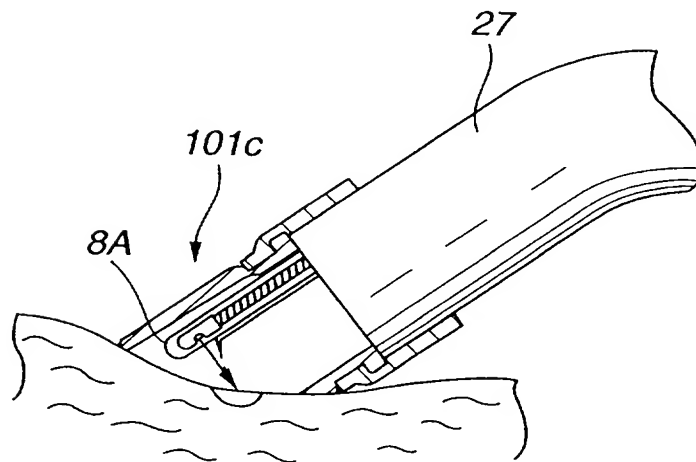

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED

FIG.75A



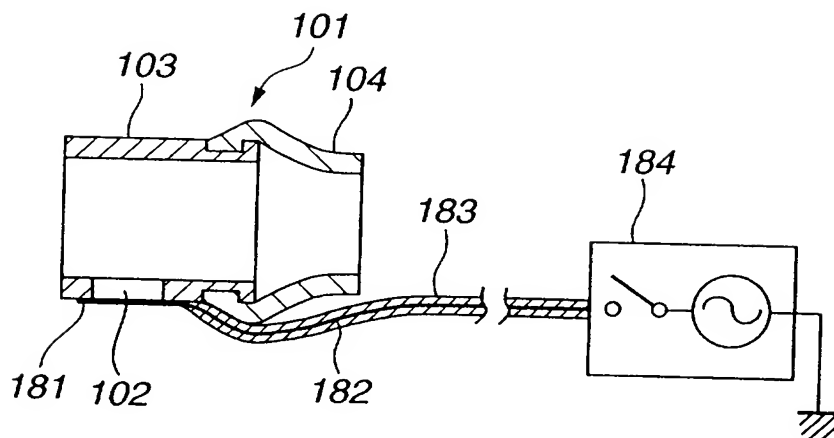


FIG.75B

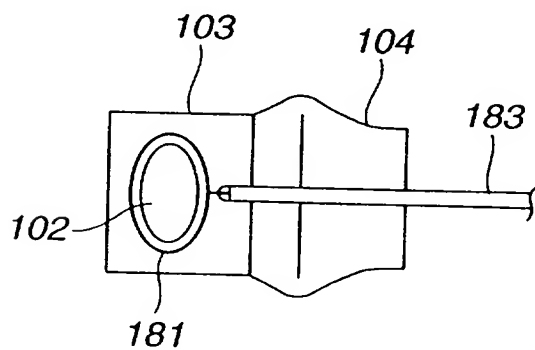



A cross-sectional view of a device assembly. A curved substrate 101c is shown with a layer 103c on its upper surface. A component 201 is positioned above the substrate, with a layer 104 on its lower surface. The vertical distance from the top surface of the substrate to the top of component 201 is labeled D. The vertical distance from the bottom of component 201 to the bottom of the substrate is labeled d.

This diagram shows a cross-sectional view of a second embodiment of the device. It features a main body 101 with a top surface 103a and a bottom surface 104. A vertical dimension D is indicated on the left. A horizontal member 201 is positioned above the main body, with a vertical dimension d shown on the right. The bottom surface 104 includes a recessed area with a sloped side wall.